




# Surge Arrester TYPE 2+3

TYPE  
2+3

## VARISTOR

TYPE 2+3 / CLASS II+III / TN-S / CE

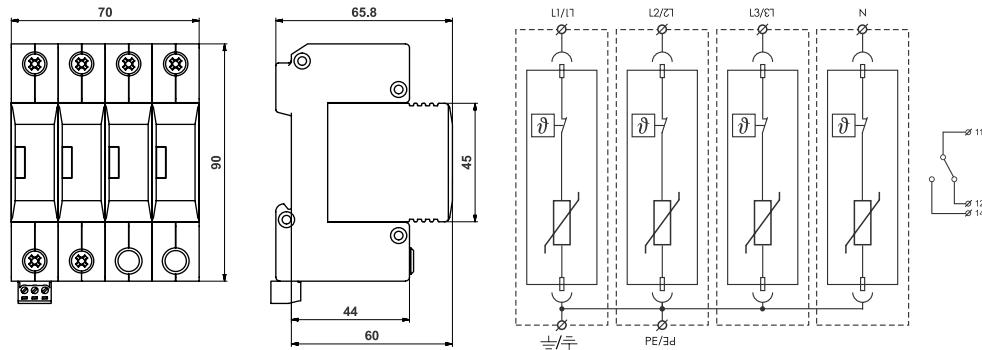

## PZH R2 275/50/4+0 M, PZH R2 275/50/4+0 MS

PZH R2\*M is a surge arrester according to EN 61643-11 ed.2 (IEC 61643-11:2011) consisting of high energy varistors. Its parameters enable its use in complex circumstances. The device is to be installed on the interface of LPZ 1 – LPZ 2 and higher zones according to standard EN 62305 ed.2 (IEC 62305:2010), i.e. into subsidiary switchboards and control boxes. The product has two PE terminals, which can not be used as a PE bridge. **S** indication specifies a version with remote monitoring. **M** indication specifies a type of construction with removable module.

PZH R2 275/50/4+0 M, PZH R2 275/50/4+0 MS	
TYPE 2+3, CLASS II+III	
Test class according to EN 61643-11 ed.2 (IEC 61643-11:2011)	TN-S
System	
Max. continuous operating voltage	U <sub>C</sub> 275 V AC / 350 V DC
Maximum discharge current (8/20)	I <sub>max</sub> 50 kA
Nominal discharge current for class II test (8/20)	I <sub>n</sub> 20 kA
Open circuit voltage	U <sub>OC</sub> 6 kV
Total discharge current (8/20) L1+L2+L3+N->PE	I <sub>TOTAL</sub> 200 kA
Voltage protection level at I <sub>n</sub>	U <sub>p</sub> < 1,3 kV
Voltage protection level at U <sub>OC</sub>	U <sub>p</sub> < 850 V
Temporary overvoltage (TOV)	U <sub>T</sub> 337 V/5 s
Response time	t <sub>A</sub> < 25 ns
Max. back-up fuse	160 A gL/gG
Short-circuit withstand capability 160 A gL/gG	I <sub>p</sub> 60 kA <sub>rms</sub>
LPZ	1-3
Housing material	Polyamid PA6, UL94 V-0
Degree of protection of enclosure	IP20
Operating temperature range	9 -40 °C ... +70 °C
Cross-section of the connected conductors (at tightening moment of clamps 3 Nm)	25 mm <sup>2</sup> (solid) - 16 mm <sup>2</sup> (wire)
The mounting method / operating position	DIN rail 35 mm / any
Failure signalisation	optical function signalization target clear – ok optical function signalization target red – fault
Potential free signal contact (S) (recommended cross-section of remote monitoring max. 1 mm <sup>2</sup> )	AC: 250 V / 0,5 A, DC: 250 V / 0,1 A
Lifetime	min. 100 000 h
Weight	360 g
Article number	<b>77 27 085 (M), 77 27 095 (MS)</b>